



CL-QM-12.5 Quadrature Modulator

Key Features


- Designed for optical Quadrature Modulation (e.g., QPSK, QAM)
- X-cut Ti:LiNbO₃
- Dual Mach-Zehnder modulator configuration on a single chip
- Wide optical bandwidth (1 to 1.6 μm)
- 50-Ohm RF drive impedance
- DC bias capability integrated on chip eliminates need for external bias-T
- Additional DC bias input for adjusting the quadrature phase difference between the two MZ arms

Applications

- Coherent optical communications
- Single Side-Band modulation (SSB)
- Optical frequency ramp generation
- High-speed optical test and measurement equipment
- Remote sensing and LADAR
- Opto-electronic warfare
- Signal intelligence

Description

The LiNbO₃-based integrated CL-QM-12.5 is designed for 12.5 Gsymbol/s using quadrature modulation (e.g., QPSK, QAM). The device is based on X-cut Ti in-diffused LiNbO₃ integrated optical waveguide technology. Two parallel Mach-Zehnder (MZ) modulators are combined using two 3-dB Y-junctions at the input and output. Each MZ modulator is driven by RF signals applied to the on-chip coplanar waveguides (CPW) electrodes designed for 50-Ohm impedance. Separate bias pads are utilized to optimize the DC bias point of each MZ modulator. An additional phase shifter ($V\pi$) pad has been added to obtain quadrature (90°) phase difference between the two outputs of the MZ modulators.

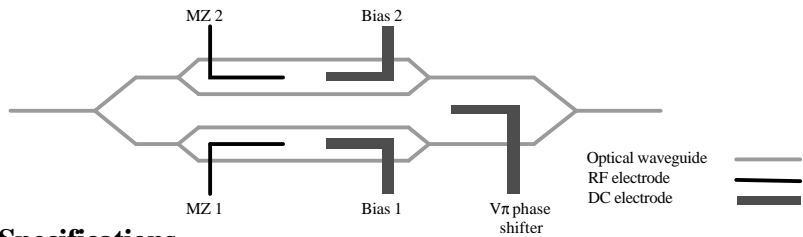

Specifications

	Min.	Typ.	Max.	Units
Optical				
Total Insertion Loss	7	10	12	dB
Extinction ratio per MZ (DC)	20	30	-	dB
Optical return loss	-	-15	-	dB
Electrical				
$V\pi$ per MZ (DC)	3	5	10	V
$V\pi$ per MZ (1 GHz)	5	7.5	15	V
$V\pi$ per phase shifter (DC)	-20	-	20	V
Phase shifter extinction ratio	20	25	30	dB
$V\pi$ bias per MZ (DC)		15	30	V
RF return loss per MZ (S_{11} , .13-10 GHz)	-	-	-10	dB
EO bandwidth per MZ	9	12.5		GHz
RF impedance per MZ		50		Ω

Preliminary



12200 Tech Road, Silver Spring, MD. 20904 USA
 Tel: 301.625.7000 Fax: 301.625.7001
 www.celight.com sales@celight.com

All statements, technical information and recommendations related to the products herein are based upon information believed to be reliable or accurate. However, the accuracy or completeness thereof is not guaranteed, and no responsibility is assumed for any inaccuracies. The user assumes all risks and liability whatsoever in connection with the use of a product or its application. CeLight, Inc. reserves the right to change at any time without notice the design, specifications, function, fit or form of its products described herein, including withdrawal at any time of a product offered for sale herein. CeLight, Inc. makes no representations that the products herein are free from any intellectual property claims of others. Please contact CeLight Inc. for more information. CeLight is a trademark of CeLight Inc. Other trademarks are the property of their respective holders. Copyright CeLight Inc.. All rights reserved.

Preliminary Data Sheet – March 2004